


UMEC International Corporation

UM2900 SERIES

Green Product
RoHS

40 – 50 Watt DC/DC Converters

- ◆ 2:1 Input Range
- ◆ 40-50 W Isolated Output
- ◆ High-Density
- ◆ Remote on/off Control
- ◆ Design meet EN60950
- ◆ RoHS Compliant

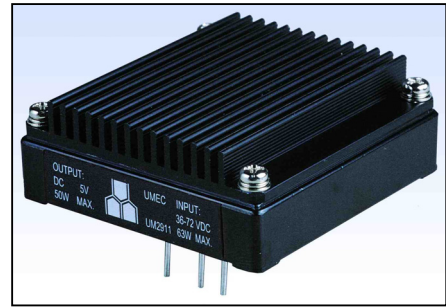

SPECIFICATIONS

All specifications are typical at nominal line, full load and 25°C unless otherwise noted.

INPUT SPECIFICATIONS

Input Voltage Range, 24V 18-36V
 48V 36-72V
 Input Filter Pi Network

OUTPUT SPECIFICATIONS

Voltage Accuracy¹, Single Output ±2% max.
 Triple Output +5V ±2% max.
 Auxiliaries ±5% max.
 Transient Response²
 Single, 25% step Load Change <500u sec.
 External Trim Adj. Range +10%
 Short Circuit Protection Continuous
 Line Regulation³ Single Output ±0.5% max.
 Triple Output +5V ±0.5% max.
 Auxiliaries ±2% max.
 Load Regulation⁴ Single Output ±1% max.
 Triple Output +5V ±2% max.
 Ripple and Noise, 20MHz BW⁵ 100mV p-p max.
 Auxiliaries 200mV p-p max.

GENERAL SPECIFICATIONS

Efficiency See Table
 Isolation Voltage, Input/Output 1500VDC
 Input/Case 1500VDC
 Switch Frequency 250KHz
 Isolation Resistance 10⁸ Ohms min.
 Case Grounding Capacity Coupled to Input
 Operating Temperature Range -25°C to +100°C
 Storage Temperature Range -40°C to +105°C
 EMI/RFI Five-Sided Continuous Shield
 Dimensions 2.2*2.2*0.5 inches
 (55.88*55.88*12.7 mm)
 Case Material Black Coated metal
 Weight 80g



NOTE

1. Defined at the static output regulation at 25°C, including initial setting accuracy, Line voltage within stated limits and load current within stated limits.
2. di/dt=0.1A/1uS, Tc=25°C; load change=0.5 lo max. to 0.75 lo max. and 0.75 lo max. to 0.5 lo max.
3. Measured from high line to low line.

4. Single: from full load to 1/4 load, Triple: from full load to 1/2 load with all other outputs at rated load.
5. Measured with 0.1uF ceramic Cap. cross to each output. 10uF/25V Tantalum Cap to Auxiliaries output.
6. This converter require a minimum 10% loading on their primary output and 10% loading on each auxiliary output to maintain specified regulation. Operation under no-load conditions will not damage these devices; however they may not meet all listed specifications.
7. For triple outputs, common pins (5 and 8) should be connected externally.
8. Output V1 must return to common 1 and output V2 and V3 to common 2 and 3 respectively in order to meet noise and regulation specifications.

REMOTE ON/OFF CONTROL

Logic Compatibility CMOS or Open Collector TTL
 Ec-ON > +2.5 VDC or Open Circuit
 Ec-OFF < 0.8 VDC
 Shutdown Idle Current 10mA
 Control Common Referenced to Input Minus

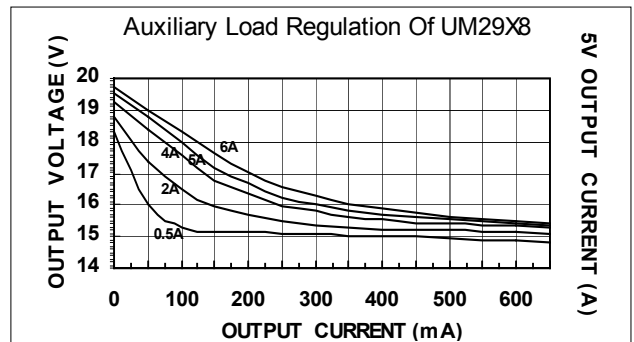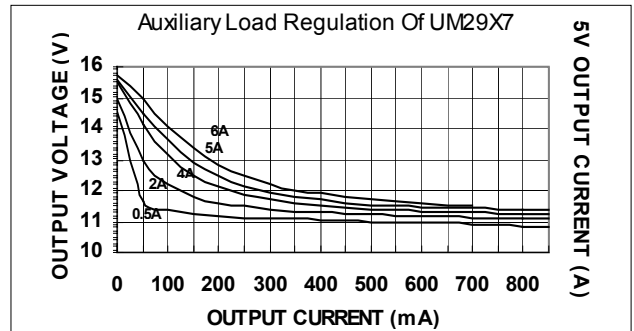

UMEC International Corporation
 2570 West 237th Street, Suite B
 Torrance, California 90505 USA


Tel: 310-326-7072
 Fax: 310-326-7058
 www.umecintl.com

UMEC International Corporation

MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	INPUT CURRENT FULL LOAD	MAXIMUM OUTPUT WATT	TYPICAL EFFICIENCY	CASE
UM2901	24 VDC	5 VDC	8000 mA	2083 mA	40 W	80%	N
UM2902		12 VDC	4160 mA	2480 mA	50 W	84%	
UM2903		15 VDC	3330 mA	2480 mA	50 W	84%	
UM2907		+5/±12 VDC	6000/±830 mA	2080 mA	40 W	80%	
UM2908		+5/±15 VDC	6000/±660 mA	2080 mA	40 W	80%	
UM2909		3.3 VDC	10000 mA	1785 mA	33 W	77%	
UM2911	48 VDC	5 VDC	8000 mA	1024 mA	40 W	81%	N
UM2912		12 VDC	4160 mA	1240 mA	50 W	84%	
UM2913		15 VDC	3330 mA	1240 mA	50 W	84%	
UM2917		+5/±12 VDC	6000/±830 mA	1029 mA	40 W	81%	
UM2918		+5/±15 VDC	6000/±660 mA	1029 mA	40 W	81%	
UM2919		3.3 VDC	10000 mA	890 mA	33 W	77%	


To order the optional heatsink, add the suffix "X" or "Y" to the model number

CASE N

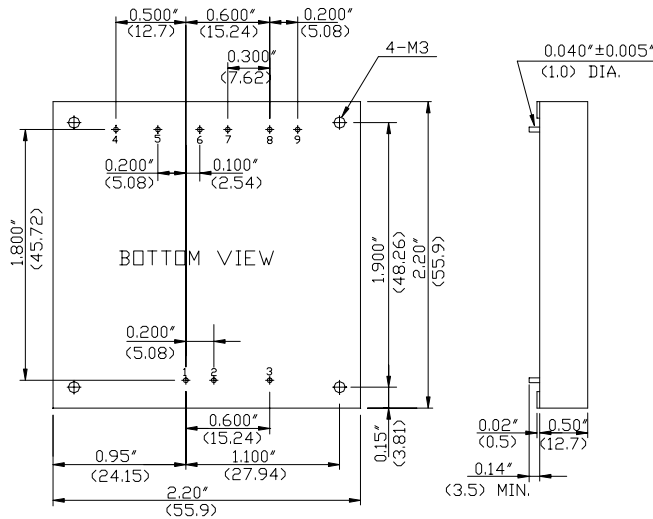


All dimensions in inches (mm)
Tolerance .xx = ±0.04"
.xxx = ±0.010"


Pin Connections		
Pin	Single	Triple
1	+Vin	+Vin
2	-Vin	-Vin
3	Remote ON/OFF Control	
4	No Pin	+Aux. Out
5	No Pin	Common2,3
6	No Pin	-Aux. Out
7	+Vout	+5 Vout
8	-Vout	Common1
9	Trim	Trim

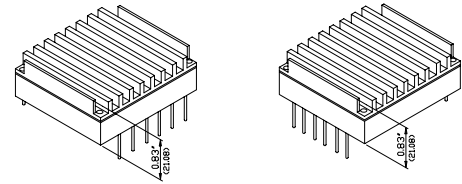

Power Derating Curve with Top-Mounted Heatsink

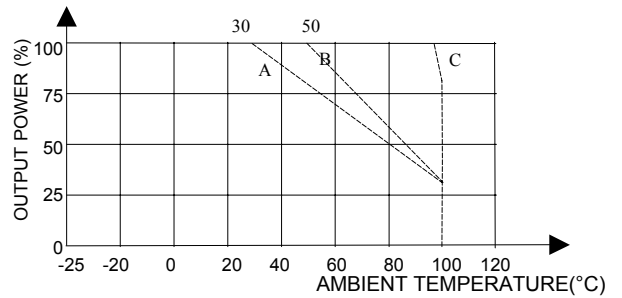

- A: Natural convection cooling without additional heat sink.
- B: Natural convection cooling with additional heat sink.
- C: Maximum case temperature under any condition.

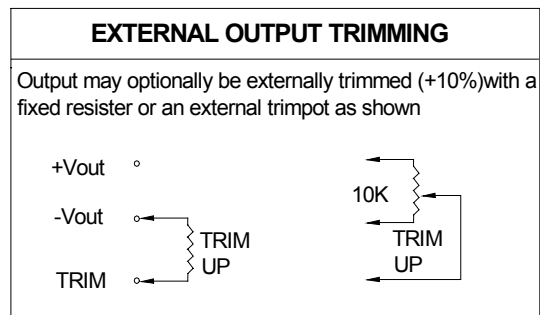

The auxiliary output voltages vary proportionally with +5V output adjustment



UMEC International Corporation
2570 West 237th Street, Suite B
Torrance, California 90505 USA

Tel: 310-326-7072
Fax: 310-326-7058
www.umecintl.com