




MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	INPUT CURRENT		% EFF	CASE
				NO LOAD	FULL LOAD		
UM3311	24 VDC	5 VDC	2000 mA	10 mA	520 mA	80	A
UM3321	48 VDC	5 VDC	2000 mA	5 mA	254 mA	82	A

NOTES: 1. Maximum capacitive load across the each output ports should not be over following indicated values.  
 2. Other output voltage can be supported upon request.

MODEL NUMBER	UM3311	UM3321
MAXIMUM <sup>1</sup> CAPACITIVE LOAD (uF)	+200	+200

CASE A

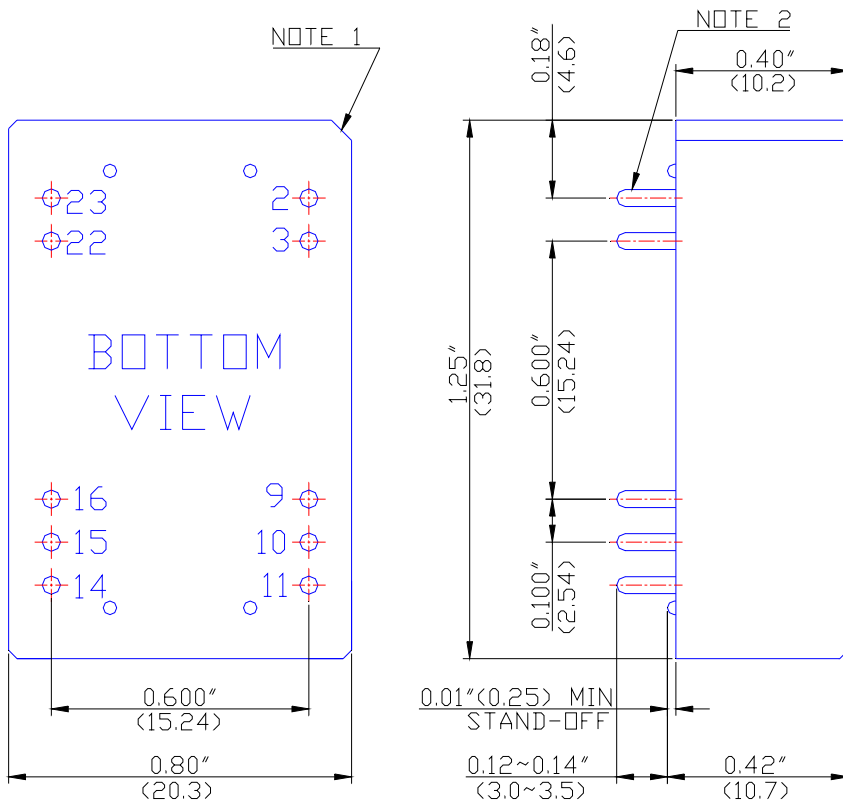

Pin Connections	
Pin	Single Output
2	-V Input
3	-V Input
9	NP*
10	NP*
11	NC*
14	+V Output
15	NP*
16	-V Output
22	+V Input
23	+V Input

\*NC (No Connection)  
 \*NP (No Pin)

All dimensions in inches (mm)  
 Note 1: Pin size is 0.020±0.005 inches (0.5mm) dia.  
 or 0.020\*0.012 inches  
 Note 2: Tolerance .xx = ±0.04"  
 .xxx = ±0.010"



**UMEC**  
**INTERNATIONAL**

2539 W. 237TH STREET, SUITE A,  
 TORRANCE, CA 90505  
 TEL: (310) 326-7072 FAX: (310) 326-7058